


WALL DESIGN

DOGATO / PROFILED
 LISCIO / FLAT
 MICRNERVATO / MICRO-RIBBED
 GOFFRATO / EMBOSSED



Pannello producibile anche in minimi quantitativi, con colori e finiture speciali su richiesta del cliente. Elemento versatile che può essere realizzato utilizzando qualsiasi tipo di laminato, ideale quindi per la creazione di strutture particolarmente gradevoli dal punto di vista estetico e architettonico.

Panel that can be produced in low quantities, with special features and colors customizable based on the client's needs, a versatile element characteristic that can be created by using every type of laminate. Suitable for the realization of projects where a special attention to creative appearance and architectural structure is required.

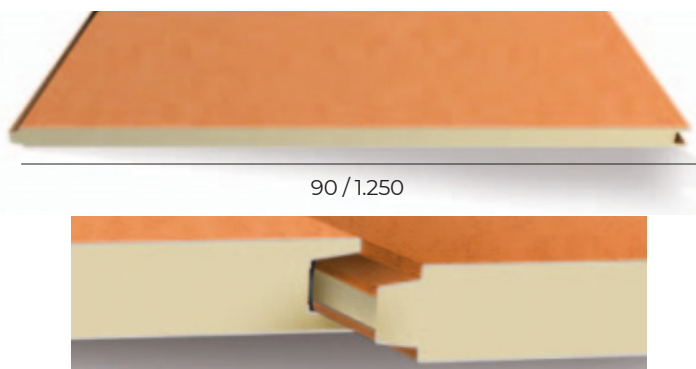

Carichi uniformemente distribuiti kg/m² / Uniformly distributed loads kg/m²

SPESSORE PANNELLO / PANEL THICKNESS	ACCIAIO ACCIAIO / STEEL STEEL - (MM 0,50 - 0,50)									
	150	200	250	300	350	400	450	500	550	600
40	265	195	155	120	85	65	50			
50	330	245	200	150	110	85	65	55		
60	395	295	235	180	135	100	80	65	50	
80	535	400	320	245	180	135	110	85	70	60
100	670	500	400	310	225	170	135	110	90	75
120	805	605	480	370	270	210	165	130	110	90
150	980	735	585	465	340	260	205	165	135	115
SPESSORE PANNELLO / PANEL THICKNESS	TRASMITTANZA TERMICA THERMAL TRANSMITTANCE (U) W/m ² K - EN 14509		TRASMITTANZA TERMICA THERMAL TRANSMITTANCE (K) W/m ² K - EN ISO 6946			PESO PANNELLI PANELS WEIGHT Sp. 0,50 - 0,50 mm - (kg/m ²)				
40	0,64		0,49			10,15				
50	0,51		0,40			10,55				
60	0,42		0,33			10,93				
80	0,30		0,25			11,71				
100	0,23		0,20			12,50				
120	0,20		0,17			13,27				
150	0,16		0,14			14,44				